

# STARPOOL

wellness concept

SOLUTION A

## SOUL SAUNA 150x150 - Natural Fir / Gres

Clear design with tasteful detail, high-quality wood and proven technologies transform every Starpool sauna into an exclusive ambience.

For more than forty years now the company has been newly interpreting a tradition that dates back thousands of years to create innovative products with ultra-modern equipment that nevertheless manage to convey a sense of culture and history, ensuring the sauna's worldwide popularity.

Each sauna and all of its component parts are produced by skilled craftsmen at our Ziano di Fiemme facility in Italy. We not only place special emphasis on the choice of suitable, long-lasting woods, ensuring the finest comfort under extreme climatic conditions, but we also emphasise the quality of the individual components for insulation, heating and the maintenance of the required temperature, thus guaranteeing optimum humidity and air exchange.

A team of technicians and engineers also spends each day working on new, innovative solutions for the development of functional, durable products.



\* The image of the product is purely representative



wellness concept

SAUNA TYPE	FINNISH SAUNA: MAXIMUM TEMPERATURE 80-90°, RELATIVE HUMIDITY 10-20%
MODEL	SOUL SAUNA
DIMENSIONS	150x150 h 233
INTERNAL CLADDING	Fir Fiemme, pale yellowish wood with knots from surrounding forests  Resin production is among the natural characteristics of this type of wood. Resin is fundamental to protect the tree from pathogens during its life. It is characterised by balsamic notes and therapeutic properties, but may also cause discomfort when in contact with skin or fabrics.  Should you find traces of resin inside the sauna, turn on the sauna stove at its maximum temperature for 48 hours so that it becomes liquid and is removed from the pores of the wood.
WOODEN SLATS DIMENSION	Width 7,5 cm
WOODEN SLATS ORIENTATION	Horizontal
ROOF	Val di Fiemme fir
BENCHES	Soul model in Natural Fir
FRONT WALL	Vision, made of tempered crystal glass, thickness 10 mm
DOOR	Made of tempered crystal glass, thickness 10 mm, width 90 cm, handle of steel / wood Sweet model, automatic hinges
HANDLE FINISHES	CHROME / NATURAL OAK
Hinges	Chrome
<b>FRAME</b>	<b>Front frame of the same wood as the inner lining</b>
LIGHTING SYSTEM	The warm white light (dimmable) goes through a glass on the ceiling along the back wall
HEATING SYSTEM	Convection from electric stove
STOVE	Stove with stainless steel cladding that includes heating elements and container for sauna stones, thus enabling energy savings, as well as infusions that increase humidity inside the sauna through the pouring of water scented with fragrances. The excellent walls thermal insulation decreases the action periods the stove.
<b>CONSUMPTION</b>	<b>Consumption: 4.5 kW until desired temperature reached - Dimensions (cm): 40x24x57 h - Stones: 15 kg - Mod. FILIUS</b>
STOVE PROTECTION (SYSTEM)	Pressure protection system : stove is switched off automatically if contact is made with objects that might cause fires.
PROTECTION WALL BEHIND STOVE	White, Grey, Green, Greige or Brown Matt glazed stoneware
WOODEN STOVE COVER	Wooden structure with adjustable feet. Height is same as that of stove



wellness concept

ACCESSORIES	Nr. 1 Thermometer Nr. 1 Hygrometer Nr. 1 Wooden hourglass min. 30 Nr. 1 Product aluminium plate Nr. 1 Sauna essence 1L Nr. 2 Headrest Red Cedar Nr. 1 sauna set: bucket (silver with bamboo handle) + ladle + birch whisk
MUSIC	Music set 1 loudspeaker + cable for connecting external devices
LOAD-BEARING STRUCTURE	Construction with struts and crossbeams made of Val di Fiemme fir
EXTERNAL CLADDING	OSB slab, 9 mm
SUPPORTO STRUTTURA	All-round skirting made of fir wood treated with water-repellent paint
HEAT/SOUND INSULATION	High-density rock wool slab 40mm
VAPOUR BARRIER	Aluminum film
AIR RECIRCULATION	Intake holes on wall next to stove and exhaust holes under the bench
GREEN PACK	<b>-Door with automatic closing mechanism</b>  The integrated floor hinge closes the door automatically: it remains open if the angle is greater than 80°.  <b>-Door sensor</b>  The sensor determines whether the door is open when the system is running. The software turns off the heating after 30 seconds and activates white lighting and a rapidly-flashing red emergency LED to indicate the fault.  <b>- Energy Efficient Software</b>  The energy management software developed by Starpool saves up to 10% consumption and ensures the correct temperature is maintained.
ALARM BUTTON	ALARM button immediately stops the stove operation, locks the lighting on the higher intensity, and communicates the alarm at the control station, if the contact has been remoted.
CONTROL	Technical Panel
TECHNICAL ROOM	REMOTE TECHNICAL PANEL
TARGET	Private

Technical panel dimensions: 60x15 x 170 h

# STARPOOL

wellness concept

SOLUTION B

## SWEET SAUNA VISION PERSONAL PLUS 150x150 - Cortina / Crystal

SweetSauna 90 by Starpool is a special wellness environment providing an all-round Finnish sauna experience for one or two guests (up to 4 in the XL version) in an area of just a few square metres - all with low energy consumption.

While the product is intended mainly for home use, it is also suitable for installation in private or social spas. SweetSauna 90 belongs to the SweetCollection series and in 2011 received the Red Dot Award for Cristiano Mino's design with its high-quality construction materials and 45% recyclability.

The product is easy to use and can be installed without any great effort.

SweetSauna 90 is designed both for long life and value creation: the sauna can at any time be removed and reinstalled elsewhere.



\* The image of the product is purely representative



wellness concept

TYPE	SWEET SAUNA 90 VISION
VERSION	PERSONAL PLUS:
	<p>HEAT BATH - the internal stove replicates all the conditions of a Finnish sauna. An internal temperature of 80-90°C is reached in just a few minutes with a relative humidity of 10-20%. These conditions produce a rapid local sweating effect. The natural oak aroma also ensures a pleasant atmosphere.</p> <p>COLOURS - the light produced by the RGB LED strips mounted on the elegant lines of the slats is reflected by the crystal or marble wall behind the stove. Available options are fixed-colour lighting or constantly changing colour fading.</p> <p>WELLNESS PROGRAM - four different programs with four different wellness objectives: Excite, Relax, Purify and Tonic. Make your choice in the twinkling of an eye and look forward to a new pleasure experience with special colour impressions and musical entertainment.</p> <p>MUSIC - the standard built-in system can be customer-controlled.</p> <p>LIGHT - white service light with RGB LED strips.</p> <p>ALARM - pressing the ALARM button immediately interrupts all SweetSauna Smart functions. If there is a remote connection, the alarm is immediately relayed to the control station.</p> <p>N.B.: the functions are selected via the touch-screen panel.</p>
DIMENSIONS	150x150 h 233 control cabinet with remote connection to switchboard 175x150 h 233 with built-in control cabinet
MINIMUM DIMENSIONS FOR INSTALLATION	160 L x 155 P x 240 H control cabinet with remote connection to switchboard 185 L x 155 P x 240 H with built-in control cabinet
TECHNICAL COMPARTMENT DIMENSIONS	30x70
INTERNAL CLADDING	Cortina: asymmetrical staves of natural wood with sawn effect
PROTECTION WALL BEHIND STOVE	Crystal glass plates with painted rear side covering the entire height of the stove back wall, to be chosen between White, Black, Gray Stone, Gray Basalt, Greige and Moka.
BENCHES	Of Thermowood® oak
FLOORING	Floor manufactured at customer's expenses
FRONT WALL	Vision, made of tempered crystal glass, thickness 10 mm
DOOR	Made of tempered crystal glass, thickness 10 mm, width 90 cm, handle of steel mod. Sweet, automatic door closing system mit Green Pack
FRAME	Front wall set in an elegant, black or white colored, 3 cm thick framework (solid surface or, on request, wood)
LIGHTING SYSTEM	RGB-LED strip
HEATING SYSTEM	Convection from electric stove
CONSUMPTION	4,5 kW
VOLTAGE	230 VAC 1P+N+PE
LOAD-BEARING STRUCTURE	Construction with struts and crossbeams made of Val di Fiemme fir



wellness concept

EXTERNAL CLADDING	OSB slab, 9 mm
SUPPORTO STRUTTURA	All-round skirting made of fir wood treated with water-repellent paint
HEAT/SOUND INSULATION	High-density rock wool slab 40mm
VAPOUR BARRIER	Aluminum film
AIR RECIRCULATION	Intake holes on wall next to stove and exhaust holes under the bench
GREEN PACK	<p><b>-Door with automatic closing mechanism</b></p> <p>The integrated floor hinge closes the door automatically: it remains open if the angle is greater than 80°.</p> <p><b>-Door sensor</b></p> <p>The sensor determines whether the door is open when the system is running. The software turns off the heating after 30 seconds and activates white lighting and a rapidly-flashing red emergency LED to indicate the fault.</p> <p><b>- Energy Efficient Software</b></p> <p>The energy management software developed by Starpool saves up to 10% consumption and ensures the correct temperature is maintained.</p>
ALARM BUTTON	ALARM button immediately stops the stove operation, locks the lighting on the white color, and communicates the alarm at the control station, if the contact has been remoted.

# STARPOOL

wellness concept

SOLUTION C

## SOUL STEAM 150x150 - Gres

The steam bath, the shower and the neck blade in SoulSteam blend together in the name of the utmost functionality, thanks to performing technologies and contained measures. The materiality of ceramics, with the particular velvet effect, in ivory and charcoal grey tones, gives sophisticated but versatile ambience at the same time.

Combined with every type of chromatic palette, the neutral tones will take the same meanings of the surrounding colours and will make SoulSteam perfect to valorise the interior design of every ambience.



\* The image of the product is purely representative



wellness concept

STEAM BATH	MAXIMUM TEMPERATURE 43°-45°, RELATIVE HUMIDITY 98%
MODEL	SOUL STEAM
DIMENSIONS	150x150 h 233 control cabinet with remote connection to switchboard 175x150 h 233 with built-in control cabinet
INTERNAL CLADDING	Walls covering in stoneware (White Matt, Grey Matt, or Greige Matt)
STEAM INLET UNDER BENCH	Direct introduction under the seating
TECHNICAL CHARACTERISTICS	- Electrical control unit for steam production, lighting and music; - Pump for introducing aromatic essences; - Water collecting station, pipes and all connecting parts; -Temperature control and operation probe; -Open signal, can be remote-controlled for switching ON/OFF; -Steam generator: * steam production is via Teflon-covered resistors completely submerged in water. Level monitoring (minimum and maximum level). * steam production with output regulator (0-100%), automatic drainage for cleaning and maintenance, collection container for limescale, defoaming process, thermal protection sensor.
CONSUMPTION	3.5 kW until desired temperature reached
WALLS	Made of preassembled panels in high-intensity insulation, framed in a self-supporting aluminum profile. Width: 90 cm, with equipment and interior cladding of porcelain stoneware
FRONT WALL	Made of tempered crystal glass, thickness 10 mm, full perimeter frame in solid surface
DOOR	Made of tempered crystal glass, thickness 10 mm, width 90 cm, handle of steel mod. Sweet, automatic door closing system mit Green Pack
HANDLE FINISHES	CHROME / CHROME
Hinges	Chrome
FRAME	Made of steel, type: Aisi 316 L, with fixed depth and aligned with automatic door closer
BENCHES	Suspended, coated with ivory white or anthracite grey glazed stoneware (White or Grey Matt)
ROOF	Made of elettro-painted aluminium sheets in White or Black, mounted inclined along walls to improve run-off of condensed water.
LIGHTING SYSTEM	The warm white light (dimmable) goes through a glass on the ceiling along the back wall
MUSIC	2 loudspeakers + cable for connecting external devices
HANDSHOWERS	Hand showers mod. Soul - Chrome finishing.



wellness concept

GREEN PACK

**-Door with automatic closing mechanism**

The integrated floor hinge closes the door automatically: it remains open if the angle is greater than 80°.

**-Door sensor**

The sensor determines whether the door is open when the system is running. The software turns off the heating after 30 seconds and activates white lighting and a rapidly-flashing red emergency LED to indicate the fault.

**- Energy Efficient Software**

The energy management software developed by Starpool saves up to 10% consumption and ensures the correct temperature is maintained.

ALARM BUTTON

ALARM button immediately stops the Steam Generator operation, locks the lighting on the higher intensity, and communicates the alarm at the control station, if the contact has been remoted.

CONTROL

Technical Panel

TECHNICAL ROOM

REMOTE TECHNICAL PANEL

TARGET

Private

# STARPOOL

wellness concept

SOLUTION D

## SWEET SPA VISION PERSONAL PLUS 150x150 - Crystal


SweetSpa is a special wellness environment providing a professional spa experience for one or two guests (up to 4 in the XL version) in an area of just a few square metres - all with low energy consumption.

While the product is intended mainly for home use, it is also suitable for installation in private or social spas.

SweetSpa belongs to the SweetCollection series and in 2011 received the Red Dot Award for Cristiano Mino's design with its high-quality construction materials, maximum hygiene thanks to a grout surface of less than 1% and 55% recyclability.

The product is easy to use, can be installed without any great effort and is ideal for home use thanks to its low energy consumption.

SweetSpa is designed both for long life and value creation: it can at any time be removed and reinstalled elsewhere.

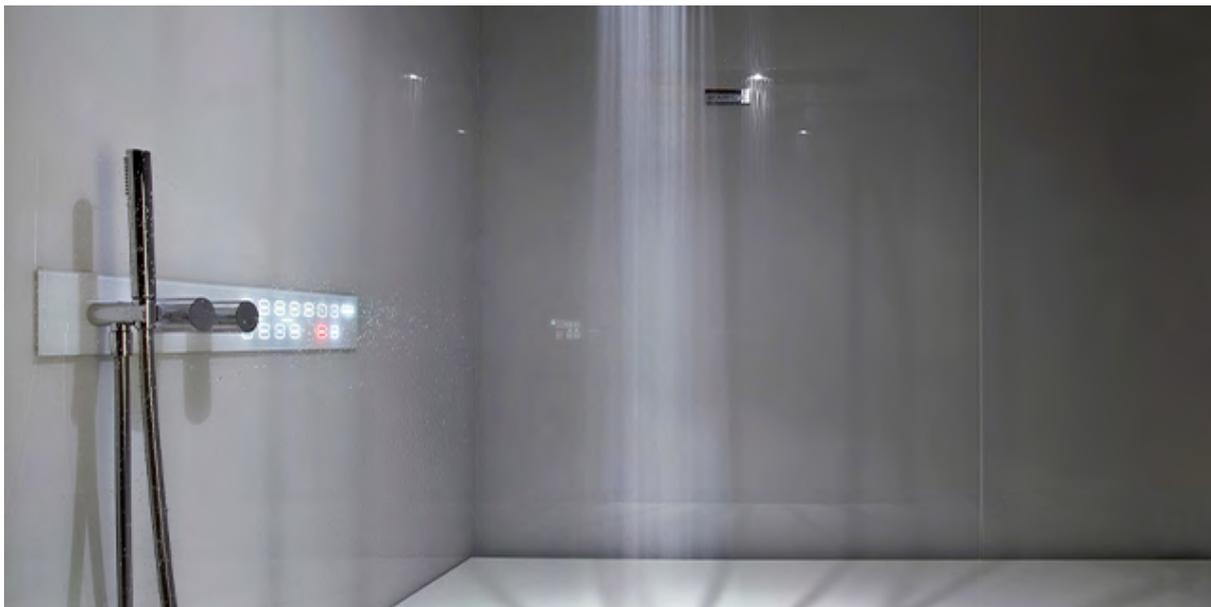

\* The image of the product is purely representative



wellness concept

TYPE	SWEET SPA VISION
VERSION	PERSONAL PLUS:  STEAM BATH - a professional system of direct steam injection allows the steam to reach a temperature of 45°C and a relative humidity of 98% within less than 1 hour. Eucalyptus aroma is mixed with the steam to increase the soothing effect. SHOWER - SweetSpa has a shower head installed in the ceiling and a wall shower controlled via a thermostat and a conductor. EXPERIENCE SHOWERS - Breeze: experience shower with cool blue spray mist and mint aroma; Rain: amber-coloured rain with maracuja aroma. WELLNESS PROGRAM - four different programs with four different wellness objectives: Excite, Relax, Purify and Tonic. Make your choice in the twinkling of an eye and look forward to a new pleasure experience with special cosmetic products and relaxed self-treatment. COLOURS - the light from the RGB LED strips dissipates in the steam. Available options are fixed-colour lighting or constantly changing colour fading. MUSIC - music set with the Spa Music Selection from Starpool, built-in box and USB and Bluetooth connections with MP3 player. LIGHT - white service light or as lighting for experience shower. ALARM - pressing the ALARM button immediately interrupts all SweetSpa functions. If there is a remote connection, the alarm is immediately relayed to the control station.  N.B.: the functions are selected via the touch panel.
DIMENSIONS	<b>150x150 h 233 control cabinet with remote connection to switchboard 175x150 h 233 with built-in control cabinet</b>
MINIMUM DIMENSIONS FOR INSTALLATION	185x155 h 240 with built-in slide-out control cabinet 160x155 h 240 control cabinet with remote connection to switchboard
KEYBOARD	A practical touch screen with an intuitive interface allows swift and simple selection of the SweetSpa functions and programs. Integrated the faucet complete with wall-mounted, diverter and mixer hand shower
INTERNAL CLADDING	<b>Crystal: wall cladding with single plates of crystal glass with white, black grey stone, grey basalt, greige ormoka painted rear side</b>
STEAM INLET UNDER BENCH	Direct introduction under the seating
STEAM BATH TECHNOLOGY CONTROL	<ul style="list-style-type: none"><li>- Electrical control unit for steam production, experience showers, wellness programmes, lighting and music;</li><li>- Pump for introducing aromatic essences;</li><li>- Water collecting station, pipes and all connecting parts;</li><li>- Temperature control and operation probe;</li><li>- Open signal, can be remote-controlled for switching ON/OFF;</li><li>- Steam generator: steam production is via resistors outside the steam cylinder, with level monitoring (minimum and maximum level) + thermal protection sensor.</li></ul>
BENCHES	Made of black or white solid-surface material, antistatic, antibacterial, resistant and easy to clean. .



wellness concept

FLOORING	Floor manufactured at customer's expenses and care with angle and drainage shaft in accordance with Starpool plan.
FRONT WALL	Made of tempered crystal glass, thickness 10 mm, full perimeter frame in solid surface
FRAME	Front wall set in an elegant, 3 cm thick solid surface framework
Hinges	Chrome
DOOR	Made of tempered crystal glass, thickness 10 mm, width 90 cm, handle of steel mod. Sweet, automatic door closing system mit Green Pack
LIGHTING SYSTEM	RGB-LED strip
CONSUMPTION	3,5 kW
VOLTAGE	230 VAC 1P+N+PE
WALLS	Made of preassembled panels in high-intensity insulation, framed in a self-supporting aluminum profile, with equipment and interior cladding of tempered crystal glass
ROOF	Made of painted aluminium sheets in White RAL 9003 or Black RAL 9004, mounted inclined along walls to improve run-off of condensed water.
GREEN PACK	<p><b>-Door with automatic closing mechanism</b></p> <p>The integrated floor hinge closes the door automatically: it remains open if the angle is greater than 80°.</p> <p><b>-Door sensor</b></p> <p>The sensor determines whether the door is open when the system is running. The software turns off the heating after 30 seconds and activates white lighting and a rapidly-flashing red emergency LED to indicate the fault.</p> <p><b>- Energy Efficient Software</b></p> <p>The energy management software developed by Starpool saves up to 10% consumption and ensures the correct temperature is maintained.</p>
ALARM BUTTON	ALARM button immediately stops the Steam Generator operation, locks the lighting on the white color, and communicates the alarm at the control station, if the contact has been remoted.
TECHNICAL ROOM	REMOTE TECHNICAL PANEL
HAND SHOWER MODEL and FINISHING	Mod. Sweet, Chrome

# STARPOOL

wellness concept

## SHOWERS

### SHOWER ONE

Shower One by Starpool has been designed to give well-being and promote the restoration of physiological conditions following the use of saunas or steam baths.

This is characterized by the combination of the following factors:

- temperature of water
- intensity of the jets
- coloured reflections on the water jets
- aroma



\* The image of the product is purely representative



wellness concept

SHOWER TYPE	SHOWER ONE A1 with shower head and one emotional shower
SHOWER TECHNICAL CHARACTERISTICS	Nr.1 double plate shower tray in polished stainless steel 60x40 complete with:  SHOWER HEAD with central white light 3000 ° K (17 lt / min)
FINISHES	Chrome
LED COLOR	WHITE
NUMBER OF SHOWERS	N.A
CERVICAL BLADE AND STORM	NO
EMOTIONAL SHOWER 1	N.A
EMOTIONAL SHOWER 2	N.A

# STARPOOL

wellness concept

## SHOWER ONE with COLD BREEZE

Shower One by Starpool has been designed to give well-being and promote the restoration of physiological conditions following the use of saunas or steam baths.

This is characterized by the combination of the following factors:

- temperature of water
- intensity of the jets
- coloured reflections on the water jets
- aroma



\* The image of the product is purely representative



wellness concept

SHOWER TYPE	SHOWER ONE WITH COLD BREEZE
SHOWER TECHNICAL CHARACTERISTICS	Nr.1 double plate shower tray in polished stainless steel 60x40 complete with:  SHOWER HEAD with central white light 3000 ° K (17 lt / min)  - Cold Breeze with No. 2 nozzles for dispensing nebulized water in droplets (2.2 lt / min) Blue LED central light Cold mint flavor  -Nr. 1 Electronic controlunit -Nr. 1 Hydraulic manifold complete with hot and cold water supply from 3/4 -Nr. 1 watertight RGB Led 3W -Nr.1 stainless steel keyboard complete with 1 piezo keys for emotional shower on / off -Nr. 1 essence dosing pump complete with tank support
FINISHES	Chrome
LED COLOR	RGB
NUMBER OF SHOWERS	1
CERVICAL BLADE AND STORM	NO
EMOTIONAL SHOWER 1	Cold Breeze
EMOTIONAL SHOWER 2	N.A

# STARPOOL

wellness concept

## ZEROBODY

### ZEROBODY DRY FLOAT PRO XL with COLORED LED LIGHTS and MASSAGE

With **Zerobody Dry Float pro**, you'll bring the regenerating power of the Dry Float Therapy into your business through an innovative system of use validated by scientific research and suitable to everyone, without any contraindication.

Being so easy to use, Zerobody Dry Float blends seamlessly in your reality; moreover, our experts will be delighted to help you define the **best protocols of use** so that the Dry Float Therapy meets your requirements effectively.

Once installed, connected to the power supply and the desired water temperature reached, Zerobody Dry Float pro is always ready to be used and **does not require special personnel**.

It is possible to customise the Dry Float Therapy session through a **touch-screen display** and intuitive software. You can select: duration, coloured lights (extra), lumbar massage (extra), audio-guide Brain Training programs, language.



\* The image of the product is purely representative



wellness concept

MODEL	ZEROBODY DRY FLOAT PRO
CERTIFICATION	CE CERTIFICATION
TECHNICAL CHARACTERISTICS	<ul style="list-style-type: none"><li>• Dimensions: 257L X 112D X 74H cm - XL version</li><li>• Voltage: 230 VAC</li><li>• Max consumption: 2500 W / 10,86 A</li><li>• Frequency: 50/60 Hz</li><li>• Structure: Iron structure varnished and coated in wood with perimeter indirect cascading white lighting. Stainless steel basin coated in soft padded fabric.</li><li>• Maximum Load: 130 Kg</li><li>• Net Weight: 230 Kg</li><li>• Operating weight: 690 Kg</li><li>• Water capacity: 460 lt</li><li>• Temperature: Adjustable water temperature</li><li>• Water heating time: 2 °C/h approximately</li><li>• Requirements for installation: Electrical power supply with earthed plug Water supply and discharge nearby (recommended) Active Ethernet network access point</li></ul>
CONNECTION	WI-FI
COVERING	<b>SKY ECO LEATHER - COLOR TO BE DEFINED</b>
SOFTWARE Z.B.	PERSONAL
LIGHTS/COLOURS	YES
MASSAGE	YES
ZEROBODY HEADSET	NOISE-CANCELLING BOSE
ZEROBODY MIRRORED BASE	NO
INCLUDED ACCESSORIES	100 disposable sheets 1 lt concentrated anti-algae solution 1 patented replacement membrane

# STARPOOL

wellness concept

## ZEROBODY CRYO XL with BLUE LED LIGHT

Zerobody Cryo is Starpool's revolution for the world of Cold Therapy: innovative in its simplicity, safety and accessibility, it features a patented water membrane that wraps the body entirely without the need to get wet, at a functioning temperature of 4-6°C in a safe and non-invasive environment.

The access is gradual and makes the approach to the Cold Therapy easier, resulting in the same benefits as the traditional cryotherapy or the immersion into icy water. Zerobody Cryo ensures a less intense exposure to the cold, offering users the complete comfort of dry floatation.

Zerobody Cryo cools off the skin, stimulating the immune and metabolic system.

This causes a general state of well-being and specific physical and mental benefits: skin rejuvenation, easing of muscle and joint pain, promotion of fast and effective muscle recovery, endorphin production, thus reducing the level of stress.



\* The image of the product is purely representative



wellness concept

MODEL

ZEROBODY CRYO

CERTIFICATION

CE CERTIFICATION

TECHNICAL

CHARACTERISTICS

- Dimensions: 257L X 112D X 74H cm - XL version
- Voltage: 230 VAC 1P+N+PE
- Max consumption: 2000 W / 8,69 A (CE)
- Frequency: 50/60 Hz (CE)
- Structure: Stainless steel tank clad in soft padding
- Maximum Load: 130 Kg
- Net Weight: 230 Kg
- Operating weight: 690 Kg
- Water capacity: 460 lt
- Cooling system: Chiller
- Water heating time: 2 °C/h
- Requirements for installation: Electrical power supply with earthed plug

COVERING

**SKY ECO LEATHER - COLOR TO BE DEFINED**

LIGHTS/COLOURS

Blu Lights Zerobody Cryo

INCLUDED ACCESSORIES

100 disposable sheets  
1 lt concentrated anti-algae solution  
1 patented replacement membrane



wellness concept

#### SAUNA EXCLUSIONS

- Floor screed and tiling (with slight angle to drainage shaft for Soft Saunas);
- Floor grill;
- Cladding and panelling of cabin exterior with appropriate inspections;
- Supply and laying of cable conduits between control cabinet and cabin;
- Power supply line with differential protection switch in Starpool control cabinet;
- Pipe with 110 mm diameter for feeding outside air into the cabin;
- Pipe with 110 mm diameter for extracting oxygen-poor air from inside the cabin;
- Remote connection of alarm contacts with help system from Starpool control cabinet and on/off switch;
- Cold water in- and outlet via outflow in Soft Saunas;
- Plumbing, electrical, masonry and painting work as well as air conditioning, dehumidification and joinery not related to the cabin and its delivery.

#### SWEET SAUNA EXCLUSIONS

- Complete laying of floors;
- Protected power supply line with differential protection switch in Starpool control cabinet;
- Possibility of ribbed connection between technical room and Sweet;
- Remote connection of alarm contacts with help system from Starpool control cabinet and on/off switch;
- Remote connection of Heat key lock and programs;
- Cladding and panelling of cabin exterior with appropriate inspections, possibility of cladding of slide-out control cabinet;
- Air-conditioning of spaces;
- Details are available on data sheet for space requirements and assembly instructions for SweetSauna.

#### SOUL/GLAMOUR/SWEET STEAM EXCLUSIONS

- Cladding and panelling of cabin exterior with appropriate inspections;
- Floor screed and tiling with slight angle to drainage shaft;
- Drainage shaft;
- Floor heating (not necessary);
- Installation of one or more siphons to be placed according to Starpool implementation plan;
- Installation of one or more drainage holes in control cabinet according to Starpool implementation plan;
- Cold water pipe in Starpool control cabinet;
- Supply and laying of cable conduits between control cabinet and cabin;
- Power supply line with differential protection switch in Starpool control cabinet;
- Pipe with 110 mm diameter for feeding outside air into the cabin;
- Pipe with 110 mm diameter for extracting oxygen-deficient air from inside the cabin;
- Remote connection of alarm contacts with help system from Starpool control cabinet and on/off switch;
- Plumbing, electrical, masonry and painting work as well as air conditioning, dehumidification and joinery not related to the cabin and its delivery.

#### SWEET SPA EXCLUSIONS



wellness concept

- Complete laying of floors;
- Hot and cold water pipe 1/2" ;
- Floor drainage outlets to Ø 50;
- Protected power supply line with differential protection switch in Starpool control cabinet;
- Possibility of ribbed connection between technical room and Sweet;
- Remote connection of alarm contacts with help system from Starpool control cabinet and on/off switch;
- Remote connection of Steam key lock and programs;
- Cladding and panelling of cabin exterior with appropriate inspections, possibility of cladding of extendible control cabinet;
- Air-conditioning of areas;
- Details are available on data sheet for space requirements and assembly instructions for Sweet Spa.

#### SHOWER ONE EXCLUSIONS

- Manufacture of floor;
- Hot and cold water pipe to ø";
- Floor drainage outlets with Ø 50;
- Power supply line with differential protection switch;
- Possibility of ribbed connection pipe between control cabinet and Sweet;
- Remote connection of alarm contacts with help system from Starpool control cabinet;
- Remote connection of keypad and program lock;
- External cabin cladding;
- Air-conditioning of areas;
- Details are available on data sheet for space requirements and assembly instructions for SweetShower.